

# RO SERIES - IN-LINE and PANEL MOUNTED FLOWMETER

AquaSource in-line and panel mounted flowmeter are machined of premium quality of polished crystal clear Acrylic materials. Internal parts constructed with SS316 materials enhance the corrosion and wear resistances. Removable bulkhead nut avoids the troublesome to separate the mounting screws. Dual scale readings eliminate the errors of unit conversions. It is good choice across our water and wastewater treatment equipment and systems.



IN - LINE FLOWMETER



PANEL MOUNTED FLOWMETER

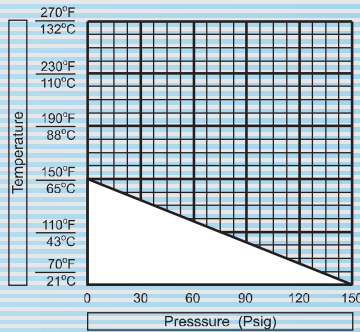


Chart and Drawing

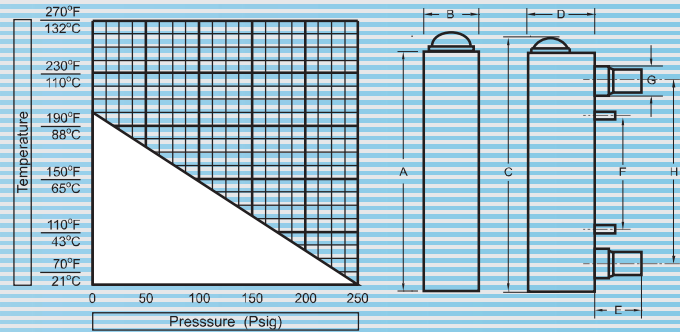


Chart and Drawing

## Ordering Information

Model	Flowrate GPM	Connection	Dimension (mm)							
			A	B	C	D	E	F	G	H
RO-FM-02-ILM	0.2 to 2.0	G - 1/2"	210	32	-	-	-	-	-	-
RO-FM-05-ILM	0.5 to 5.0	G - 1/2"	210	32	-	-	-	-	-	-
RO-FM-10-ILM	1 to 10	G - 3/4"	278	45	-	-	-	-	-	-
RO-FM-20-ILM	2 to 20	G - 3/4"	265	51	-	-	-	-	-	-
RO-FM-35-ILM	5 to 35	G - 1"	265	51	-	-	-	-	-	-
RO-FM-02-PLM	0.2 to 2.0	G - 1/2"	168	32	175	35	25	76	25	127
RO-FM-05-PLM	0.5 to 5.0	G - 1/2"	168	32	175	35	25	76	25	127
RO-FM-10-PLM	1 to 10	G - 1"	226	45	234	46	33	100	37	160
RO-FM-20-PLM	2 to 20	G - 1"	226	45	234	46	33	100	37	160
RO-FM-35-PLM	5 to 35	G - 1"	226	45	234	46	33	100	37	160

Remark: ILM is In-Line / PLM is Panel Mounted



AquaSource Components Ltd.

Address: Room 1806, 18/F., Regent Centre, 88 Queen's Road C., Central, Hong Kong.

Tel: (852)3427-3040

Fax: (852)3186-6739

e-mail: sales@aqua-components.com

www.aqua-components.com